



iCMS, Cable Management System is designed in modular form for easy assembly and transportation. The system comes in pre-assembled sections as a standard. Or the system can also be in modular form for easy transportation. The system consists of two aluminium profiles, hollow section and I-Beam. It is designed to withstand all the weight of the cables that fully packed in the system.

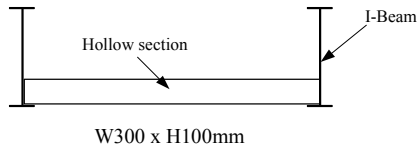


Basic standard section
(iCT-300/100)




Length: 3m

Quarter section
(iQ-300/100)



Connecting Bracket
(iB-300/100)

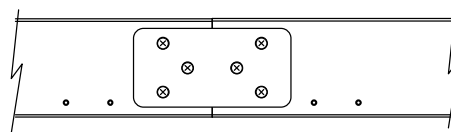

Others

	Tee section	Cross section	Inner Riser section	Outer Riser section
Model No.	iT-300/100	iC-300/100	iIR-300/100	iOR-300/100

Technical Data

	Aluminium Alloy	Density (kg/m ³)	Melting range approx.	Ave. Coeff of Thermal expansion (2 - 100 Deg. C) per Deg. C	Modulus of elasticity (M Pa)	Temper	Hardness (Webster B)	Tensile Strength (M Pa)		Shear Strength (M Pa)	Elongation (% in 50mm)
								Ultimate	Yield		
Hollow Section	6063	2700	616-654 Deg. C	23.4 x 10 ⁻⁶	68.9 x 10 ³	T5	8-10	151	110	117	7
I-Beam						T4	4-7	131	68	-	14